

SPECIFICATIONS


ATTACHMENT

Model		TL26.60
Performance		
Maximum lift height	mm	5,800
Maximum Lift Capacity	kg	2,500kg ¹⁾ , 2,100kg ²⁾
Max forward Reach (24" tires)	mm	3,500
Breakout force	kg	3300 daN
Auxiliary Standard Flow	l/min	80
Operating Weight	kg	4,460
Drive System		
Engine Model	BOBCAT / D24	
Emission	Stage V	
Horsepower	HP/kW	75/54.6
Fuel Tank	liter	65
Standard tires	12-16.5"	
Max Travel Speed- Standard tire	km/h	25
Steering modes	3 steering modes with automatic wheel realignment 2 wheel steering / 4 wheel steering / Crab-steer	
Hydraulic system		
Transmission	Continuous variable hydrostatic transmission with electronic regulation & 4 wheel drive	
Hydraulics	Pump type	Gear pump with LS valve
	Valve bank	Flow sharing valve Electro proportional control
	Max. pump capacity	l/min 80
Braking	Service brake	Oil-immersed discs
	Parking and emergency brake	Passive brake with automatic actuation
Dimension		
A	Overall length to forks face	mm 3,989
B	Overall length to front tyres	mm 3,442
C	Length from front axle to forks face	mm 1,044
D	Wheelbase	mm 2,360
E	Length from rear axle to machine rear	mm 662
F	Overall height std cab	mm 1,930
G	Ground Clearance	mm 250
H	Width over standard tyres	mm 1,832
I	Track width (front & rear)	mm 1,500
J	External turning radius at tyres	mm 3,235
K	Outside width of cab	mm 930

1) EN 1459-1 compliance (EU Norm)
2) ISO AS10896.1 compliance (New Australia Norm)
Quick-Tach option applied

Specification(s) are provided for comparison purposes only and are subject to change without notice.


DIMENSION DRAWING

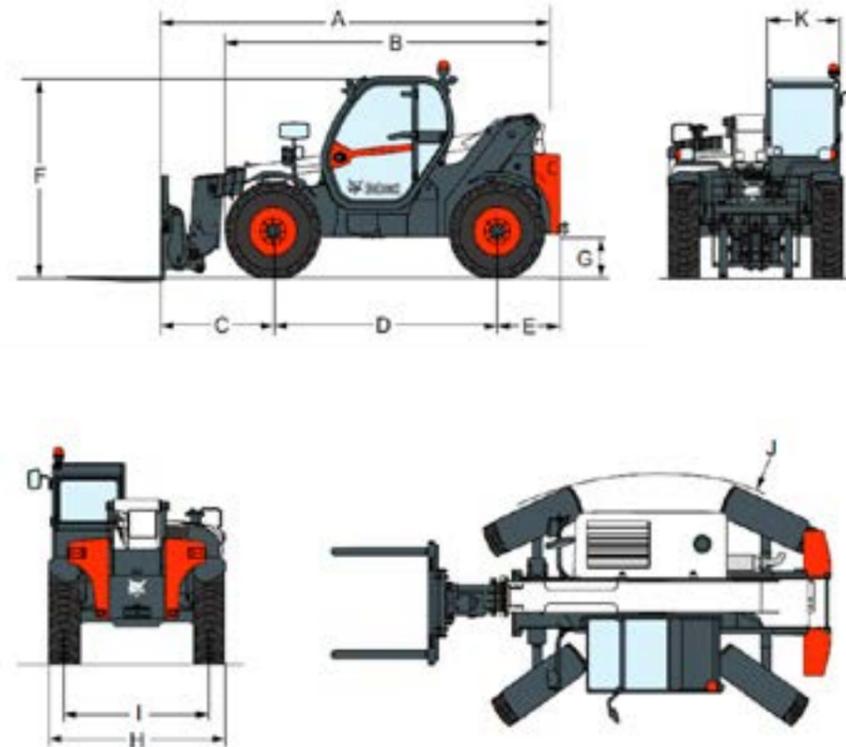

LOAD CHART

New Australian Standard AS10896.1 compliance

Max lift height	5800mm
Max lift capacity	2,500kg ¹⁾ , 2,100kg ²⁾
Operating weight	4,460kg
Engine model	Bobcat D24 75HP, Stage V

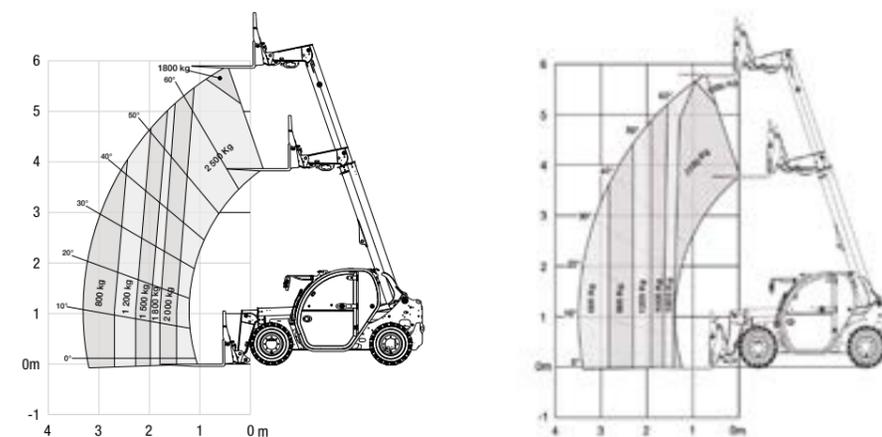

1) EN 1459-1 compliance (EU Norm)

2) ISO AS10896.1 compliance (New Australia Norm)

VERSATILITY ROOTED IN DESIGN

Bobcat Telehandlers are designed to excel in a variety of applications in handling, and lifting application. With Bobcat attachments, you can make the most of this versatility with optimal efficiency.

ATTACHMENTS

- Pallet forks, floating
- Crane jibs
- Bucket



Pallet forks, floating



Jib, crane